HIKVISION



HF-VH243
Fire Detection Camera

Quick Start Guide

Product Information

Read all information and instructions in this document carefully before using the device and keep it for further reference.
For more device information and instructions, please visit our website at https://www.hikvision.com. You can also refer to other documents (if any) accompanying the device or scan the QR code (if any) on the packaging to get more information.

About this Document

• This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only.
• The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (https://www.hikvision.com). Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision") makes no warranties, express or implied.
• Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

About this Product

This product can only enjoy the after-sales service support in the country or region where the purchase is made.

Acknowledgment of Intellectual Property Rights

• Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
• Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
• HIKVISION and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
• Other trademarks and logos mentioned are the properties of their respective owners.

LEGAL DISCLAIMER

• TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
• YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.
• YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END- USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
• IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

⚠
1. CAUTION: Risk of explosion if the battery is replaced by an incorrect type.
2. Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).
3. Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
4. Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
5. Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
6. Dispose of used batteries according to the instructions.

English


Diagram Reference

1 Cautions

- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region.
- Correctly install and maintain the camera. Although camera can help save lives by providing an early warning of a fire, they are not a substitute for an insurance policy. Home owners should have adequate insurance to protect their lives and properties.
- The camera is only suitable for safe use in areas below 2000 m above sea level and under non tropical conditions.
- The camera has multiple power supplies. Please disconnect all power supplies during maintenance.
- According to relevant national standards, when supplying power to weak current equipment, the power supply current shall not exceed 8 A and the power shall not exceed 100 W to prevent safety accidents.
- If it is necessary to use it in special environment (such as peak, iron tower, forest, etc.), please add lightning arrester at the equipment inlet.
- Do not aim the lens at strong light (such as light illumination, sunlight or laser beam, etc.), otherwise the image sensor will be damaged.
- Do not touch the image sensor directly. If it is necessary to clean it, please slightly wet the soft and clean cloth with alcohol and gently wipe away the dust; When the product is not used, please add the dust cover to protect the image sensor.
- To ensure the normal detection of the camera, do not use hair spray, insecticide, diluent and other substances that can produce colloidal suspension near the alarm.
- No naked flame sources, such as lighted candles, should be placed on the equipment.
- The product is a camera, which can send out audible and visual alarm signals in the event of fire, but cannot extinguish fire.
- Do not be at high volume for a long time near to the ears to prevent hearing impairment.
- Keep the packing so that in case of any problem, pack the alarm in its original packing and send it to the agent or return it to the factory for disposal.
- If the camera does not work properly, contact the dealer or the nearest service center. Never attempt to disassemble the camera yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)


2 Appearance

Device Size

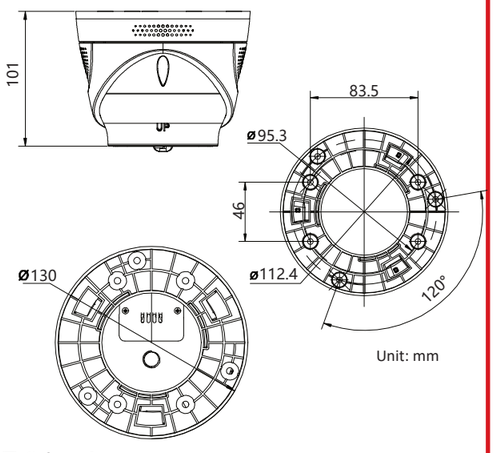

Unit: mm


Sphere Appearance



1. Indicator
2. LED
3. Microphone
4. Visible Light Camera
5. Temperature Sensor
6. Plastic Base
7. Speaker


3 Interface & Wiring

Device Interface




*The model of HF-VH243(B) does not have audio interface and alarm interface.

SD Card Interface

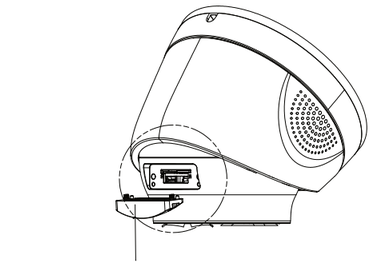

View Details A



Details A

1. Micro SD Card
2. Reset Button
3. Debug UART

4 Indicator

Indicator	Status
Red/Blue light always on	Alarm (Red and blue light modes are optional)
Yellow light always on	Fault
Green light always on	Normal

5 Installation


Installation Notification

• Install the camera according to the instructions in this guide.
• To prevent injury, the camera must be securely attached to the floor/wall in accordance with the installed instructions.
• Before installation, confirm that the camera and other mounting parts in the box are in good condition.
• Do not install the camera in new or renovated buildings until all work is completed. The installation wall shall be able to bear at least 4 times the total weight of the camera and installation accessories.
• Install multiple alarms if the installation location (such as ceiling) is longer than 32.81 ft (10 meters).
• For bracket installation, please pay attention to the bearing indications on the mounting bracket.
• If it is installed on the cement wall, first install the expansion bolt and then install the bracket. If on the wooden wall, directly install bracket with tapping screws.
• Please install the waterproof tape and the mesh waterproof package according to the specifications. For the specific installation method, please refer to the user manual.
• When moving the camera, do not directly pull the cable at the tail of the camera, or it may affect the waterproof performance or cause wiring problems.

Installing Device


The camera can be installed using ceiling mounted, wall mounted, lifting mounted, and inclined base mounted. DS-1273ZJ-130-TRL wall mounted bracket is recommended for wall mounted, DS-1271ZJ-130-TRL lifting bracket is recommended for lifting mounted. Taking ceiling mounted installation as an example for explanation.

1 Take out the installation sticker that comes with device, stick the sticker onto the wall of the camera that needs to be installed, and drill holes according to the holes marked on the sticker.




(Unit: mm)

2 Fix the plastic base on the wall with three PA4 × 25 screws.



3 Arrange and connect the power and network cables of the camera, and ensure electronic insulation.


4 Aim the camera at the plastic base, tighten it in the indicated direction.

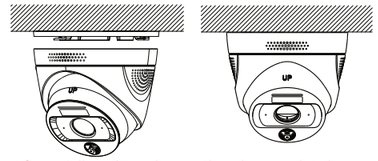


Note: After installing, the UP logo on the sphere needs to be upwards.

Adjusting Camera Angle

Compare the video images on the preview screen, adjust the device angle by rotating the fixed cover and the sphere, and adjust the screen to the desired to follow scene.

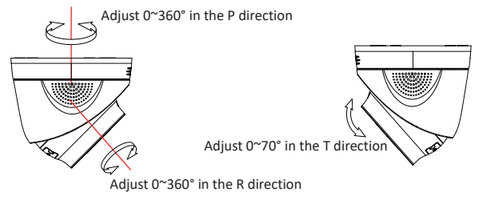


6 Installation of Waterproof Accessories for Ethernet Ports



Steps:
1. Pass ⑦ through ④⑤⑥ in sequence and fix it with ③;
2. Insert ② into the bottom of ①;
3. Insert ③ and ①, then tighten ⑥ and ④, and ④ and ① in sequence to complete the assembly.

①Circle Ethernet Port
②O-shaped Gasket
③Crystal Head
④Waterproof Body
⑤Waterproof Rubber Ring
⑥Fixed Nut
⑦Wire

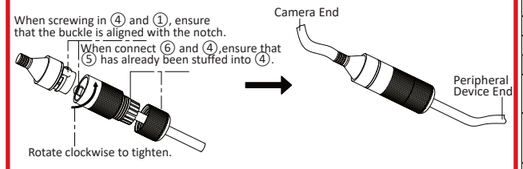

7 Network Configuration

Connecting Network

Connect to Ethernet using a network cable. After connecting to the network, you can log in to the browser to configure device functions and parameters.

Initializing Device

When the device is first powered on and used, it must be activated before it can be used normally.
Original IP address: 192.168.1.64
The device can be activated through SADP software, client software and browser. Taking initializing device through browser as an example for explanation.

Steps:

1 Connect the computer and device directly with a network cable.

2 Modify the computer IP and device IP to be in the same network segment.

3 Enter 192.168.1.64 in the browser to enter the activation page. And create activation password in the page.

4 Click OK and initialize the device.

5 Enter activation password, go to ***Configuration - Network - Basic Configuration - TCP/IP***, modify device IP address to make it and current network be in the same network segment.

8 Specifications

Camera	
Max. Image Size	2560 × 1440
Sensor Type	1/2.7" Progressive Scan CMOS
Main Stream	50Hz: 25 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 30 fps (2560 × 1440, 1920 × 1080, 1280 × 720)
Sub Stream	50Hz: 25 fps (704 × 576, 640 × 480, 352 × 288) 60Hz: 30 fps (704 × 480, 640 × 480, 352 × 240)
Min. Illumination	Color: 0.015 Lux@(F1.6, AGC ON)
Lens	2.8mm：horizontal FOV113.31°, vertical 59.85°, diagonal FOV 136.26° 4mm：horizontal FOV 92.59°, vertical 49.67°, diagonal FOV 111.14°
Image Settings	Saturation, brightness, contrast, sharpness, AGC and white balance can be adjusted through the client or browser.
Adjusted Angle	Horizontal: 0° ~ 360°; Vertical: 0° ~ 70°; rotated: 0° ~ 360°
WDR	Digital WDR
Shutter	1/25 ~ 1/100,000 s
Day/Night Switch	IR cut filter
Image Enhancement	BLC, 3D DNR
SVC Encoding	H.264, H.265
H.265	Main Profile
H.264	Main Profile/High Profile
Main Stream Video Compression Standard	H.265, H.264
Sub Stream Compression Standard	H.265, H.264
Video Bitrate	256Kbps ~ 8 Mbps
General	Reset, anti flicker, heartbeat, image, password protection, video occlusion, IP address filtering
Intelligent Alarm	on/off duty alarm
WEB Configuration	Support web preview, configuration
Protocol	TCP/IP, HTTP, HTTPS, DHCP, DNS, RTP, RTSP, RTCP, NTP, IPv4, UDP
Storage	Support microSD /microSDHC /microSDXC card, up to 256 G
Interface Protocol	ONVIF(PROFILE S, PROFILE G), ISAPI
Power Consumption	≤ 6.5 W
IR Range	30 m
Accessory Type	Wall mount, pendant mount, junction box
Detector	
Temperature Sensing Mode	Non-contact temperature sensing
Thermography Alarm Shielded Area	Customized 4 rectangular regions
High Temperature Alarm	Yes
Alarm Indicator Light	Red/Blue：Alarm（Red/Blue light mode optional） Green：Normal Yellow：Fault
Temperature Measurement Range	-20 ℃ ~ 120 ℃
Thermography Precision	±3°
Function	
Remote Silence	Yes
Interface	
Alarm Interface	HF-VH243:1 way alarm in，2 way alarm out HF-VH243(2.8mm)(B), HF-VH243(4mm)(B): NA HF-VH243(2.8mm), HF-VH243(4mm): 1 way alarm in, 2 way alarm out
Audio Interface	HF-VH243: 1 built-in microphone, 1 built-in speaker HF-VH243(2.8mm)(B), HF-VH243(4mm)(B): NA HF-VH243(2.8mm), HF-VH243(4mm): 1 built-in microphone, 1 built-in speaker
Auxiliary Power Interface	DC 12V
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
General	
Power	DC 12V POE: IEEE802.3af, CLASS 2
Using Environment	Temperature: -30 ℃ ~ 60 ℃ Humidity: less than 95% (no condensing)
Dimension (ϕ × H)	Φ 130 × H 101 mm
Weight	450 g
Execution Standard	Q/HKD 006-2019
Mounting Height	Wall mounted: 2.4 m ~ 2.8 m, Pendent: 3.3 m ~ 6 m
Ingress Protection	IP66

Scan the QR code for user manual.

Hangzhou Hikvision Digital Technology Co., Ltd
Address: No.555 Qianmo Road, Binjiang District, Hangzhou City, Zhejiang Province, China
Tel: 0086 400-800-5998

UD42551B