DS-KAB673-EDB
Peripheral Module



The peripheral module should be applied with DS-K1T673 series face recognition terminal, which supports bluetooth and can recognize multiple card types, including EM card, M1 card, Felica card, and DESfire card.

- Supports recognition of multiple card types, including EM card, M1 card, and DESfire card.
- Supports bluetooth function.


▪ Specification

Authentication	
Card type	EM card,M1 card,DESfire card
Card reading frequency	13.56 MHz,125 KHz
General	
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 % to 90 % (no condensing)
Dimensions	110.5 mm × 40 mm × 23.78 mm (4.4" × 1.6" × 0.9")
Function	
Bluetooth	Bluetooth 5.0

▪ Available Model

DS-KAB673-EDB

▪ Dimension

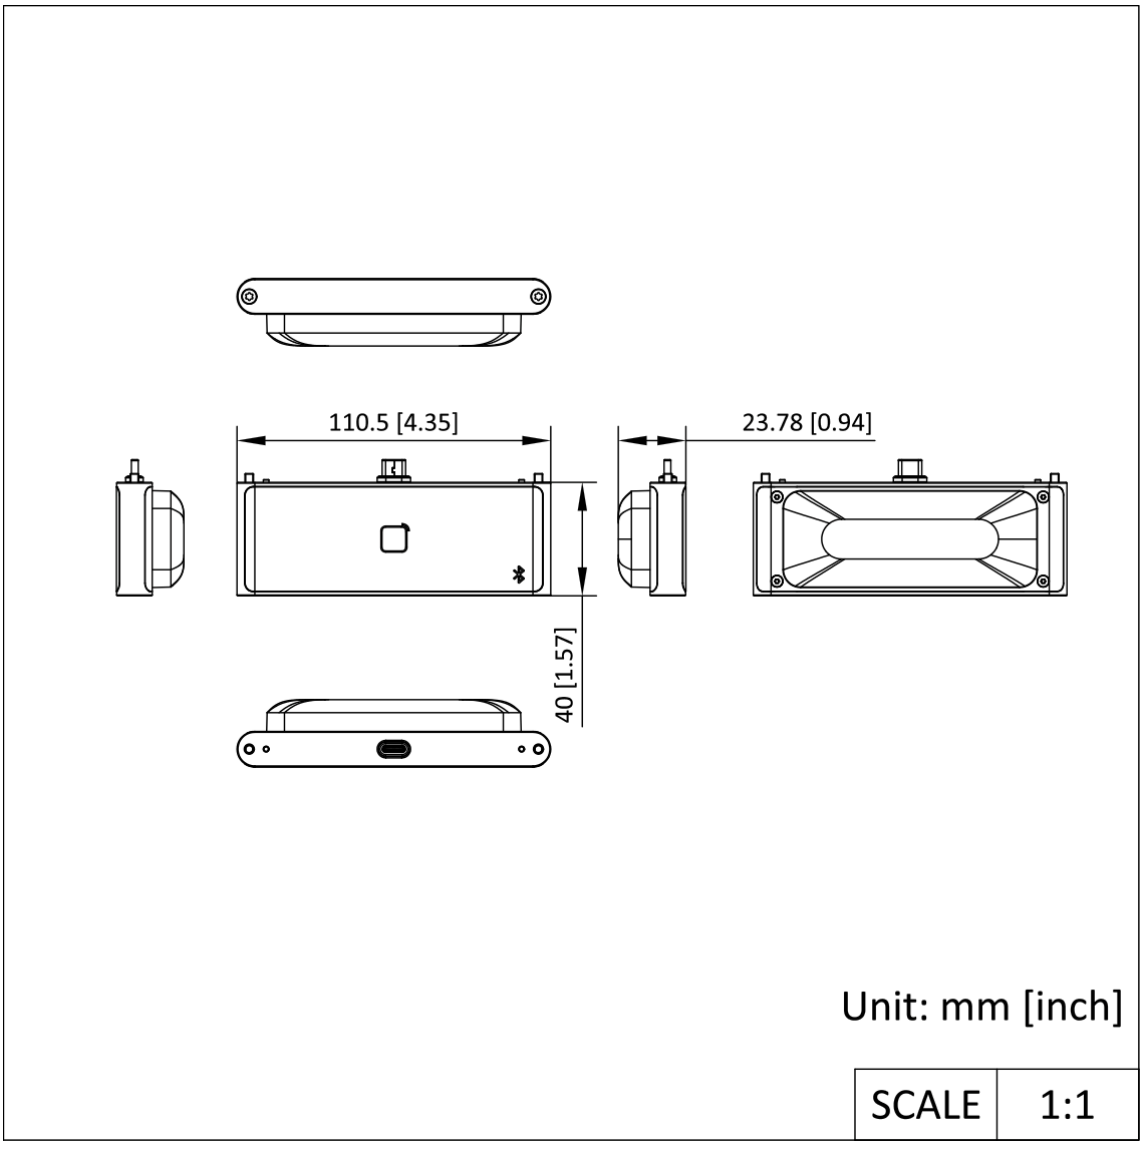

▪ Accessory


DS-K1T673DX-BR


DS-K1T673TDX-BR


DS-K1T673TDWX-BR#BRA


DS-K1T673DX-G1


DS-K1T673TDWX


DS-K1T673TDX


DS-K1T673DWX


DS-K1T673TDGX


DS-K1T673DX


DS-K1T673TDX-BR#BRA


DS-K1T673TDX-T


DS-K1T673DX-BR#BRA


DS-K1T673TDWX-BR

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision HikvisionHQ HikvisionHQ Hikvision_Global Hikvision Corporate Channel hikvisionhq

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.