# DS-K1T671M
# Face Recognition Terminal



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens, built-in M1 card reading module
- Face recognition distance (without face mask): 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- Max.6000 faces, Max.6000 cards
- Two-way audio with client software, indoor station, and mainstation
- Supports TCP/IP
- Configuration via the web client
- Supports ISAPI and ISUP5.0 protocol
- IP65


## ▪ Specification

| | |
|---|---|
| **Display** | |
| Screen size | 7 inch |
| Operation method | Capacitive touch screen |
| Type | LCD |
| **Video** | |
| Lens | 2 |
| Resolution | 2 MP |
| FOV | HFOV = 46°; VFOV = 87° |
| **Audio** | |
| Audio quality | Noise suppression and echo cancellation |
| **Network** | |
| Wired network | Support |
| **Interface** | |
| Network interface | 1 RJ-45, 10/100/1000 M self-adaptive |
| Lock control | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| Alarm input | 2 |
| Alarm output | 1 |
| TAMPER | 1 |
| RS-485 | 1 RS-485 (Half duplex, HIKVISION) |
| Wiegand | 1 Wiegand (Hik 26bit,Hik 34bit) |
| USB | 2 |
| **Authentication** | |
| Card type | M1 card |
| Card reading frequency | 13.56 MHz |
| **General** | |
| Power supply | 12 VDC, 2 A |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) |
| Working humidity | 10 to 90% (No condensing) |
| Dimensions | 239 mm × 116.5 mm × 33 mm (9.4" × 4.6" × 1.3") |
| Installation | Surface mounting |
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil) |
| Platform | Hik-ProConnect and HikCentral Professional |
| **Function** | |
| QR code recognition | Support |
| Face anti-spoofing | Support |


## ▪ Available Model

DS-K1T671M

## ▪ Dimension

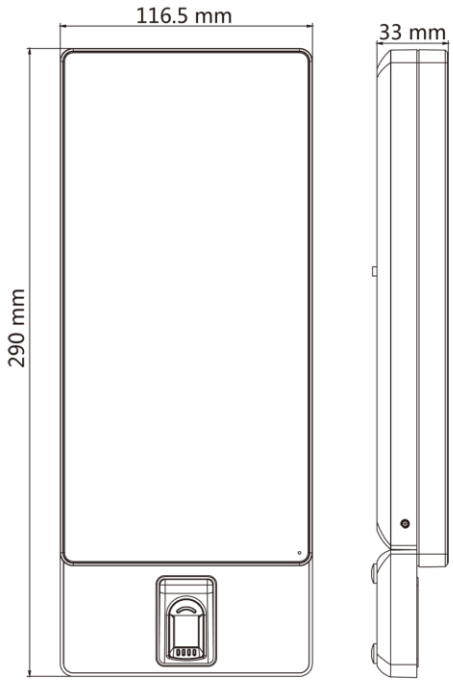


With Fingerprint Module

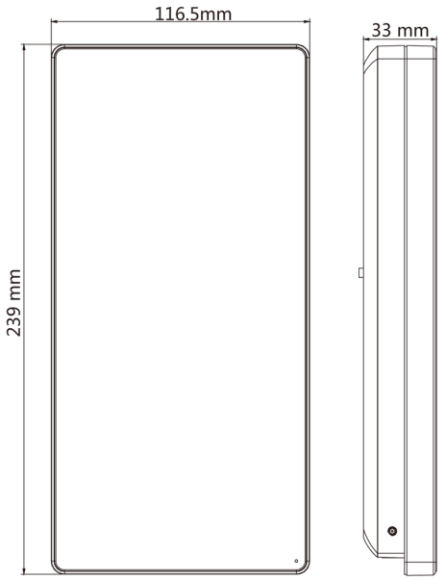


Without Fingerprint Module

## ▪ Accessory

### ▪ Optional

| DS-KAB671-S<br>Protective Shield |
| --- |
|  |

**Headquarters**
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision HikvisionHQ HikvisionHQ Hikvision_Global Hikvision Corporate Channel hikvisionhq

©Hikvision Digital Technology Co., Ltd. 2023 I Data subject to change without notice I