HF-AIN1
Addressable Input Module




Module is a very important part of the fire alarm system, which is used to control the action of the external equipment and accept the signal of the external equipment.

- Nonpolarity two bus, convenient for construction wiring, avoiding equipment failures caused by incorrect connections.
- User-friendly interactive design with clear indicator lights on the front shell.
- A variety of module specifications to meet different needs.

▪ Specification

Bus Parameters	
Wiring requirements	RVS 2*1.5㎡ Flame Retardant Wire, Max distance: 1000 m
General	
Weight	101 g
Main Power Supply	DC 24 V （DC 18 V ~ DC 28 V）
Indicator	1, Red
Coding Parameter	1~250
Wiring	Two-wire, polarity-free
Operating current	≤300 uA
Product Dimension	L 86 mm * W 86 mm * H 41 mm （with base）

▪ Dimension

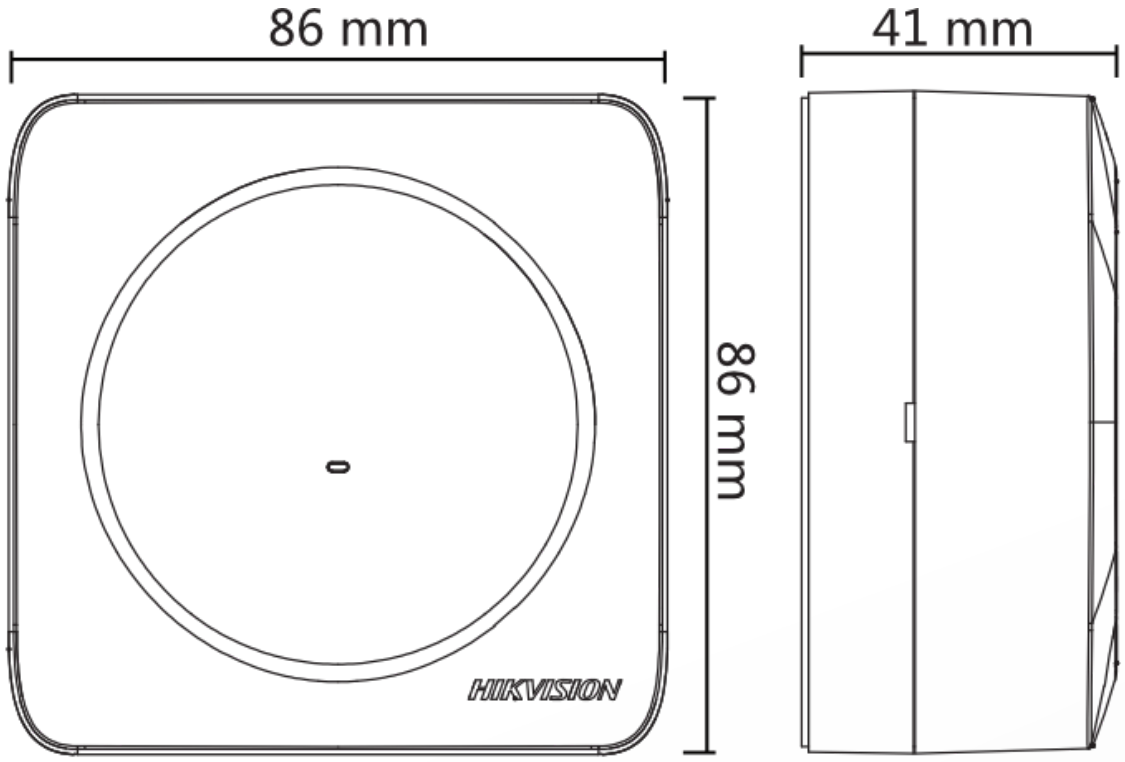

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®