HF-GN110
Gas Detector



The Standalone Natural Gas Detector provides the concentration

When the natural gas leakage in the protected area reaches the alarm

- Support multiple function, alarm, test, silence, fault and malfunction.
- Support log saving function, record alarm, alarm recovery, fault, fault recovery, sensor failure and other types of logs.
- Support valve output and fan output.

▪ Specification


Detector	
Alarm Volume	70dB~115dB @1m(A-weighted)
gas type	CH4
Measuring range	0~25%LEL
Function	
Alarm threshold	8%LEL
Interface	
Output Signal	1-way solenoid valve output interface, 1 way exhaust fan output interface
General	
Working principle	Catalytic combustion
Power supply	AC 220 V
Protection Level	IP 30
Environment	Temperature：-10 ℃ ~ 55 ℃; Humidity：≤93% （40 ℃、non-condensing）
Dimension (ϕ × H)	122 mm × 77 mm × 34 mm
executive standard	GB 15322.2-2019

▪ Available Model

HF-GN110

HF-GN110(IN-STD)

▪ Dimension

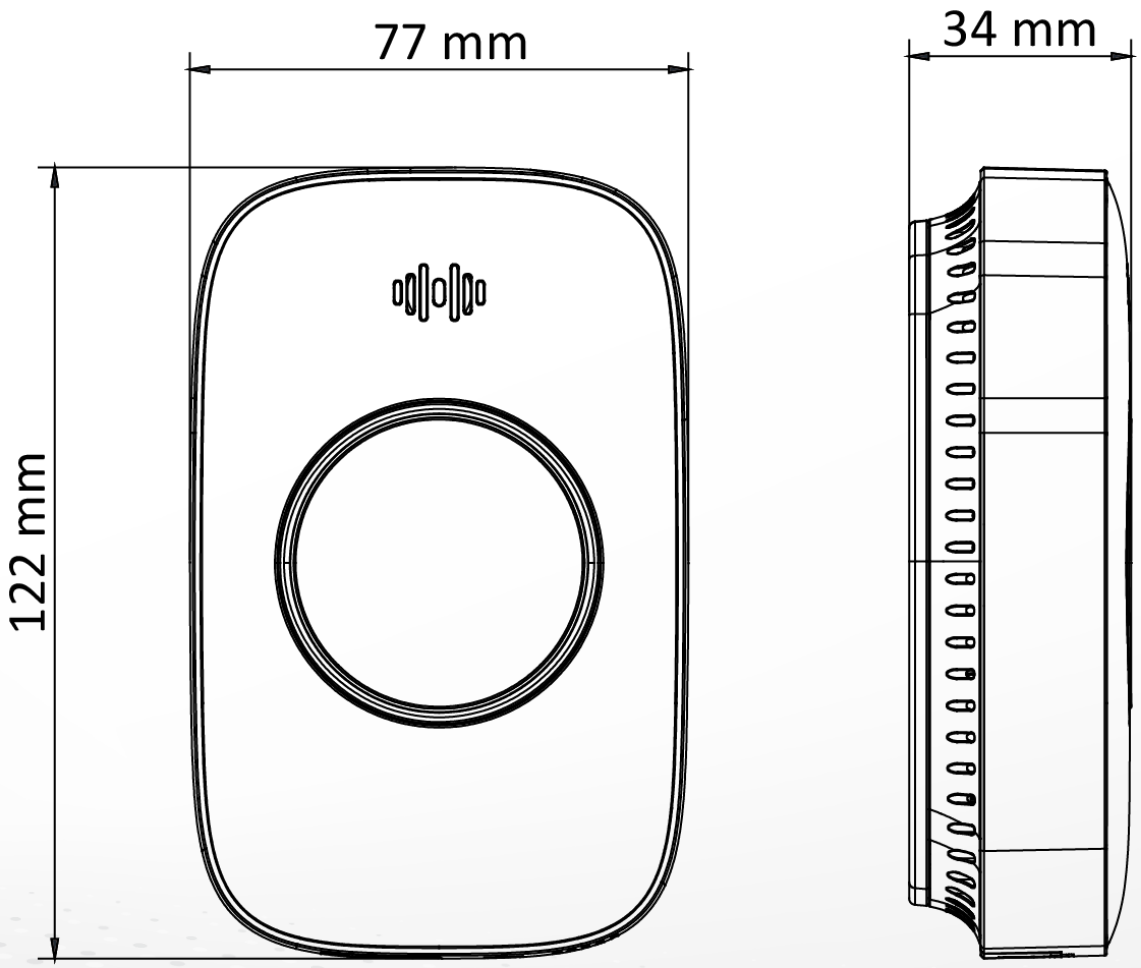

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®