


HF-PC03

2C×16AWG Shielded Fire Alarm Cable

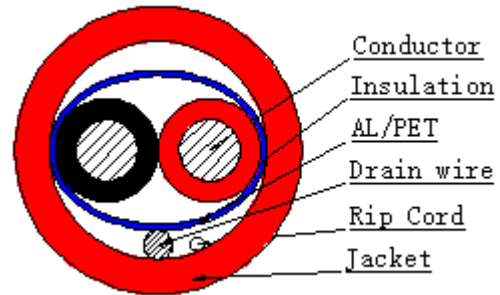

Technical Parameter

Basic	
Model Name	HF-PC03
Description	2C×16AWG Shielded Power-Limited Fire Alarm Cable
Standard	UL1424
Conductor	
Conductor Material	BC
Conductor Construction (mm)	1×1.29±0.01
Insulation	
Insulation Material	PVC
Insulation Diameter(mm)	1.75±0.1
Color	Red, Black
Shield	
Shield Material	AL/PET
Drain wire	
Drain Wire Material	TC
Rip Cord	
Rip Cord	Yes
Jacket	
Jacket Material	PVC
Jacket Diameter(mm)	4.5±0.3
Color	Red
Electrical & Physical Characteristics	
Conductor DCR 20°C	≤13.5Ω/KM
Operating Temperature Range	-20°C ~ +75°C
Max. Operating Voltage	300V (not for power purposes)
Fire Rating	FPLR

See Far, Go Further



www.hikvision.com
support@hikvision.com

