
HIKFIRE

HF-PG1
Wireless Gateway



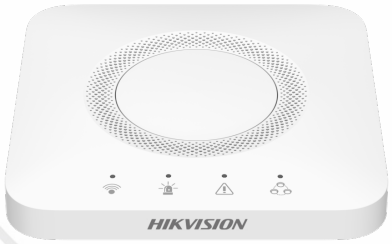

- Ultra slim design, only 15mm thick.
- Up to 30 nodes can be stably connected via the HF-Link wireless interconnection technology.
- Supports 2.4 GHz Wi-Fi connection and access to Hik-Protect app.
- 4-color status indicator light for quick system status check.
- Support one-touch muting and pairing, splash-proof, and convenient on-site management.

▪ Specification


General	
Alarm Indicator Light	Red
Power	DC 5V
Communication Mode	HF-PG1: HF-PG1-WF/R8(O-STD):Wi-Fi,868 HF-PG1-WF/R(O-STD):433,Wi-Fi
Status Indicator Light	Green
Working Temperature	-10 ℃ ~ 55 ℃
Working Humidity	5% ~ 95% (non-condensing)
Weight	96 g (device only)
Dimension (L × W × H)	90 mm * 90 mm * 15.2 mm
Installation	Desktop
Communication Distance	Wi-Fi: 50m sub1g: 1000m
Volume	80 dB @ 1m

▪ Available Model

HF-PG1-WF/R8

HF-PG1-WF/R

▪ Dimension

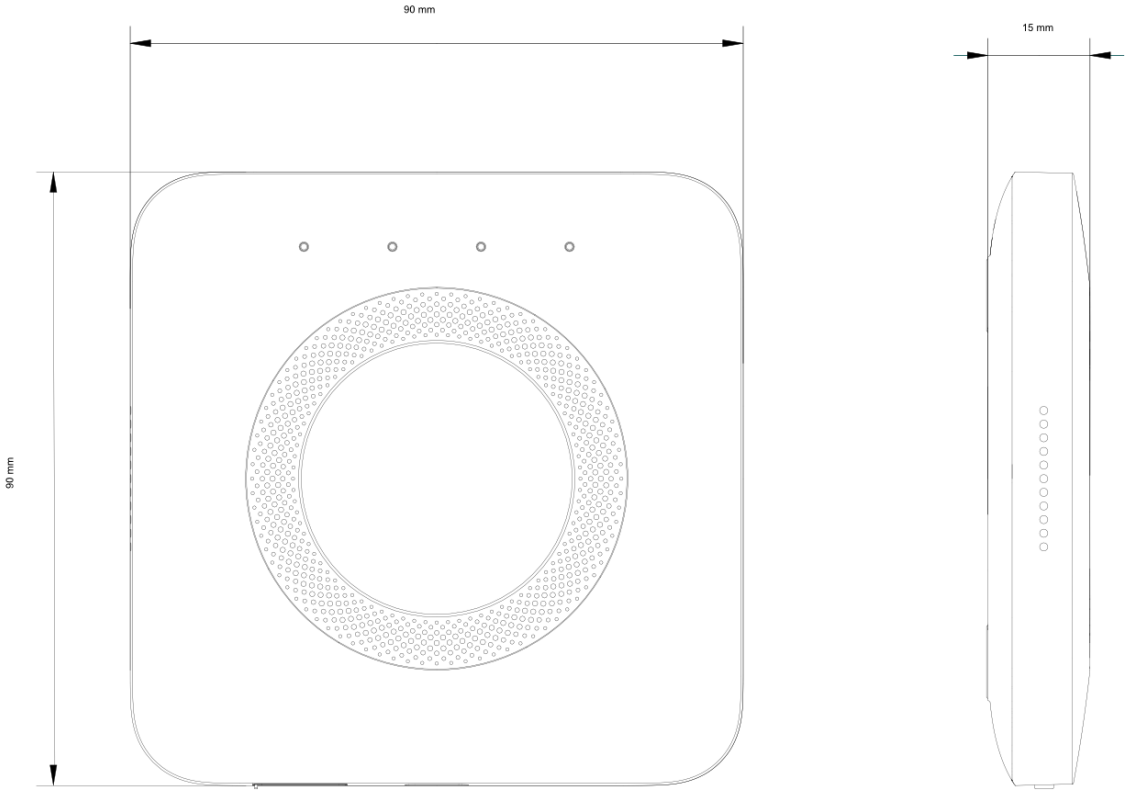

HIKFIRE

Safer Place Better Life

Headquarters
Address: Room 311, Unit B, Building 2, No.399,
Danfeng Road, Binjiang District, Hangzhou City,
Zhejiang Province, China
Tel: 0086 400-800-5998
www.hikvision.com

©Hangzhou Hikfire Technology Co., Ltd. 2022 I Data subject to change without notice I