HIKFIRE

HF-PR1
Wireless Visual Control Unit



- Support E-link display, and magnetic base.
- Up to 30 nodes can be stably connected via the HF-Link wireless interconnection technology.
- 3-color status indicator light for quick system status check.
- Support one-touch muting and testing, convenient on-site management.

▪ Specification

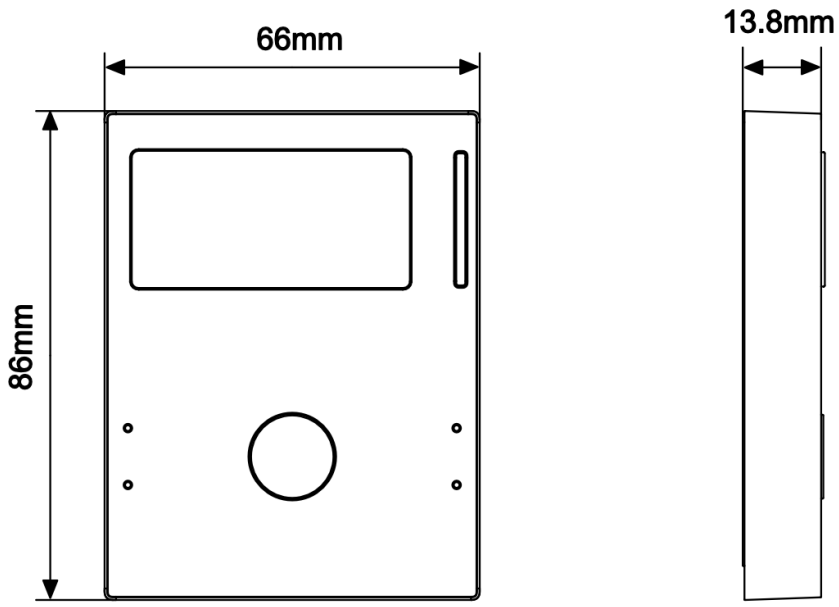
Model		HF-PR1
Key Feature	Maximum Number of Interconnected Units	30pcs
General	Alarm Indicator Light	Smoke Alarm Indicator Light and CO Alarm Indicator Light
	Power	DC 3V , 2*AA batteries
	Communication Mode	HF-PR1-R8(O-STD):HF-Link/868 HF-PR1-R(O-STD):HF-Link/433
	Battery Life Span	Up to 2 years (standby time)
	Working Temperature	0 ℃ ~ 50 ℃
	Working Humidity	5%～95% (non-condensing)
	Weight	91.5 g (device only)
	Dimension (L × W × H)	66 mm * 13.8 mm * 86 mm
	Installation	Wall-mounted
	Communication Distance(open distance)	Up to 600 m
	Maximum Number of Cascaded Units	Support a maximum of 8 cascaded remote-control panels
	Fault Indicator Light	Yes
	Paring Indicator Light	Yes

▪ Available Model

HF-PR1-R

HF-PR1-R8

▪ Dimension


66mm
86mm
13.8mm

HIKFIRE

Safer Place Better Life

Headquarters
Address: Room 311, Unit B, Building 2, No.399,
Danfeng Road, Binjiang District, Hangzhou City,
Zhejiang Province, China
Tel: 0086 400-800-5998
www.hikvision.com

©Hangzhou Hikfire Technology Co., Ltd. 2022 I Data subject to change without notice I